


# F-DMUX-8-C55

8 channel DWDM mux/demux and CWDM expander with monitor ports

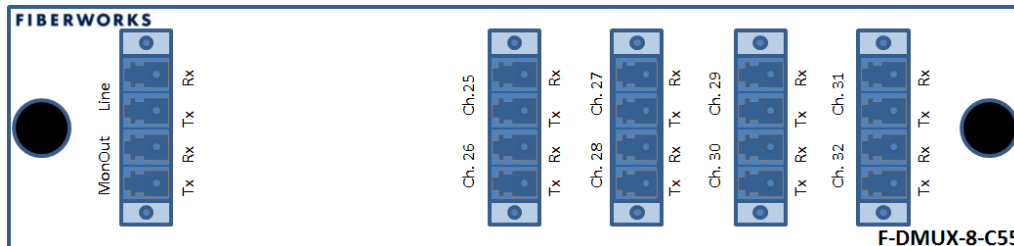

## DESCRIPTION

This compact DWDM multiplexer/demultiplexer covers 8 DWDM channels which fits within any standard CWDM 1551 nm channel. Monitor ports ensures easy troubleshooting without downtime.

## FEATURES

- Dense WDM in compliance with ITU-T G.694.1
- 8-channel DWDM mux/demux, 100 GHz spacing
- All channels fit within any standard 1551 nm CWDM channel
- Can also be used as standalone DWDM mux/demux
- 2% monitoring ports for Tx and Rx
- Based on thin film optics with epoxy free optical path
- Protocol transparent (support 1G, 10G etc.)
- Two modules fit in 1U in 19" rack
- LC connectors

## FUNCTIONAL DESCRIPTION



Ch. 25 = 192.5 THz = 1557.36 nm  
 Ch. 26 = 192.6 THz = 1556.55 nm  
 ⋮  
 Ch. 32 = 193.2 THz = 1551.72 nm

**TECHNICAL DATA**

Parameter	Unit	Value
Max insertion loss (module / link)	dB	< 4.5 / < 6.5
Channel spacing	GHz	100 (≈ 0.8 nm)
Center Wavelength Accuracy	nm	± 0.1
Channel Flatness	dB	< 0.4
Channel Passband (@ - 0.5 dB bandwidth) Min.	nm	0.22
Channel Uniformity	dB	< 1.5
Channel Ripple	dB	< 0.3
Adjacent channel isolation	dB	> 25
Non-adjacent channel isolation	dB	> 35
Directivity	dB	> 50
Return Loss	dB	> 45
Monitoring ports power level	dB	$P_{\text{Line port}} - 17$
Wavelength thermal stability	nm/°C	< 0.002
Insertion Loss thermal stability	dB/°C	< 0.005
Power Handling	mW	< 300
Operating temperature	°C	0 to +65
Storage temperature	°C	-40 to +85
Dimensions (H x W x D)	mm	43.6 x 183 x 118.5

**ORDERING INFORMATION**

Product number	Name	Description
F-DMUX-8-C55-MLU	F-DMUX-8-C55	Fiberworks 8 ch. DWDM Mux/Demux for C55 ITU ch. 25-32, 100GHz, Monitor ports, LC
F-CHASSIS-1U2-19	F-CHASSIS-19	Fiberworks 19" 1U chassis for two modules, with one blanking plate