


F-TAP-x-1-3070

Multimode Optical Network Tap, 30% monitoring ports

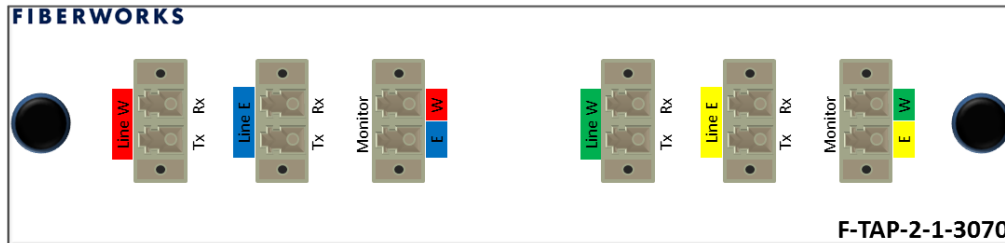

DESCRIPTION

The Fiberworks taps are completely passive network taps mounted in a standard Fiberworks module. They provide a monitor port with a complete replica of the network traffic irrespective of protocol and bitrate.


Each module contains up to four duplex network taps.

Two of these modules fit in a 1U 19" chassis. The same chassis can also accommodate the Fiberworks CWDM/DWDM mux modules.

FEATURES

- High density / compact size
- Dual window (850 / 1310 nm)
- 30% monitoring ports
- LC/PC connectors
- Protocol transparent (support 1G, 10G etc.)
- Two modules fit in 1U in a 19" rack

FUNCTIONAL DESCRIPTION

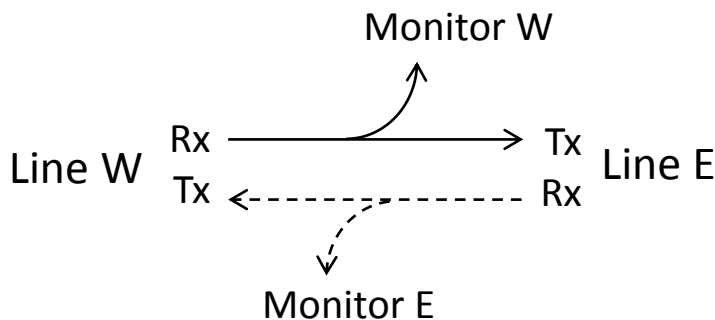

TECHNICAL DATA

Parameter	Unit	Value
Insertion loss line ports	dB	< 2.0
Power level monitoring port	dB	$P_{line} - 6.0$
Excess loss	dB	< 0.1
Operating wavelengths	nm	600 – 1600
Fiber Type		Corning Multimode 50/125
Operating temperature	°C	-20 to +70
Storage temperature	°C	-40 to +85
Dimensions (H x W x D)	mm	43.6 x 183 x 118.5

ORDERING INFORMATION

Product number	Name	Description
F-TAP-1-1-3070-M5-LP	F-TAP-1-1-3070	Fiberworks Network Tap, 30% mon., 1 tap MM 50/125, IL 2.0dB, LC/PC connectors
F-TAP-2-1-3070-M5-LP	F-TAP-2-1-3070	Fiberworks Network Tap, 30% mon., 2 taps MM 50/125, IL 2.0dB, LC/PC connectors
F-TAP-4-1-3070-M5-LP	F-TAP-4-1-3070	Fiberworks Network Tap, 30% mon., 4 taps SM 9/125, IL 1.9 dB, LC/UPC connectors
F-CHASSIS-1U2-19	F-CHASSIS-19	Fiberworks 19" 1U chassis for two modules, with one blanking plate